

UVLOC




"ARE YOU PREPARED?"

The UltraVoice™ Local Operating Console (UVLOC) is an easy to use remote user interface for Indoor and Outdoor Alert and Notification Systems. The UVLOC provides a system operator, building inhabitant or facility personnel, an activation point that emulates the functions and capabilities of the UltraVoice Controller series. The UVLOC offers the capability to: activate (7) tone or pre-recorded digital voice messages, record/play a live voice message, and conduct live public address (PA) announcements. The UltraVoice Local Operating Console is ideal for providing multiple activation points in an Indoor Mass Notification System.

The UVLOC is rated for Indoor use and can be surface or recessed mounted. Up to (10) UVLOC's can be easily interfaced into an UltraVoice controller, as each UVLOC is hard-wired utilizing standard CAT5 cable and Battery Operated from its respective UV controller. The ability to provide up to (10) remote activation points offers flexibility in large facilities while battery operation increases the system reliability by insuring operation when AC power fails.

Outfitted with onboard LED's, the UVLOC indicates when the unit is armed and powered. In addition, arming the UVLOC signals the Federal Commander Digital System, alerting operators that the unit has been activated for use.

Designed to enhance "all hazard" warning capabilities, the UVLOC provides increased system flexibility, redundancy, and reliability, making it a necessary component to any alert and notification system.

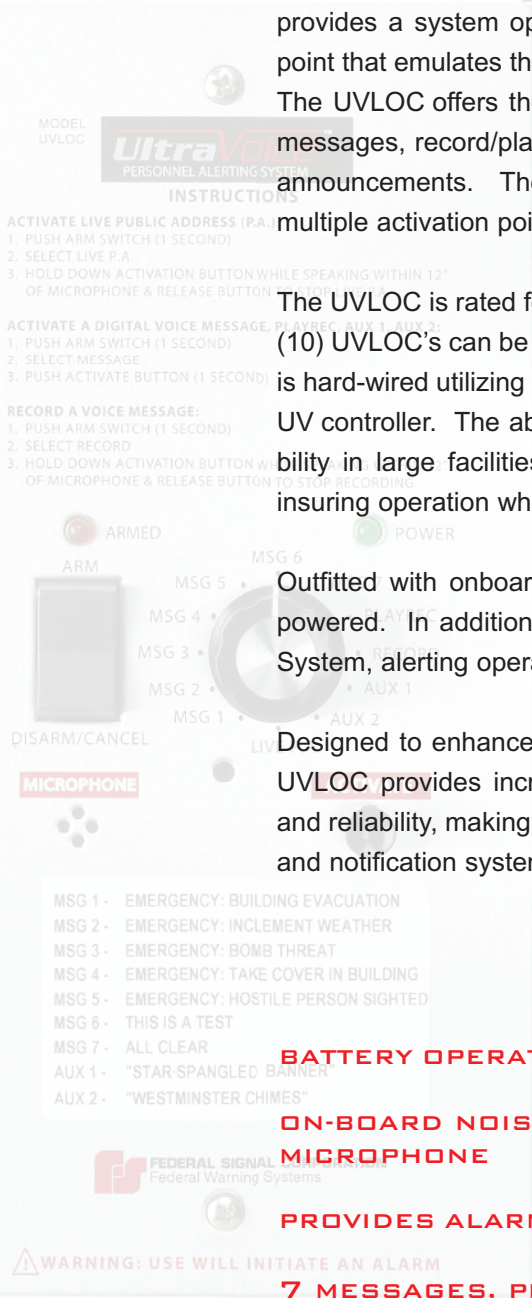

- MSG 1 - EMERGENCY: BUILDING EVACUATION
- MSG 2 - EMERGENCY: INCLEMENT WEATHER
- MSG 3 - EMERGENCY: BOMB THREAT
- MSG 4 - EMERGENCY: TAKE COVER IN BUILDING
- MSG 5 - EMERGENCY: HOSTILE PERSON SIGHTED
- MSG 6 - THIS IS A TEST
- MSG 7 - ALL CLEAR
- AUX 1 - "STAR-SPANGLED BANNER"
- AUX 2 - "WESTMINSTER CHIMES"

BATTERY OPERATION

ON-BOARD NOISE CANCELLING

MICROPHONE

PROVIDES ALARM STATUS WHEN ARMED

7 MESSAGES, PLUS PLAY & RECORD CAPABILITY



UVLOC SPECIFICATIONS

POWER REQUIREMENTS:

Local Operation Console
Operating Voltage: 20-32 VDC

Operating Current: <25 mA

Local Operating Console-Interface Module

Operating Voltage: 20-32 VDC

Operating Current: < 50 mA

Audio Output: 600 ohm Balanced, Adjustable
700mVpp to 5Vpp

INSTALLATION SPECIFICATIONS:

Interface Cable Type: CAT5, 4 pairs

Maximum distance between UVLOC and UV
Controllers: Approx. half mile of cable, ≤ 200
ohms of cable

Maximum # of UVLOC's per UV Controller: (10)
(External Wire Management Required)

DIMENSIONS:

Size: 10" x 4.75" x 3" max

OPERATING TEMPERATURE:

Indoor Use, -30°C to +65°C, Non condensing
humidity


ORDER INFORMATION:

UVLOC: Maximum of (10) units can be interfaced to
a UltraVoice™ Siren Controller (UV) or UltraVoice™
Indoor Controller (UVIC)

UVLOC-IM: One (1) Interface module must be
ordered per UV or UVIC

*Cabling is not included with any model

UltraVoice™ Personnel Alerting System (Diagram)
©2006 Federal Signal Corporation

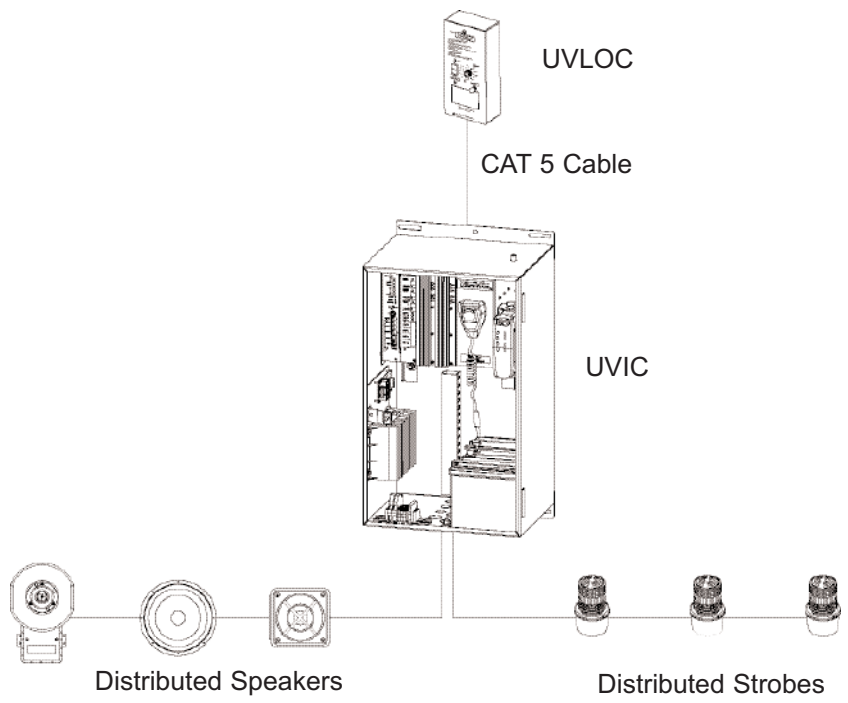

Advancing security and well-being.
 2645 Federal Signal Drive, University Park, IL 60466-3195
 Sales: 800/548-7229 • Fax: 708/534-4855
 Visit us at www.federalwarningsystems.com

